

KARATE BLAZERS

TM

OPERATOR'S MANUAL

Power Supply	DC+5V DC+12V
Monitor	Horizontal Screen
Game Style	1unit 1~4players 2units 2~4players



VIDEO SYSTEM CO.,LTD.

Connector Diagram

3P・4P


SOLDER SIDE	NO.	NO.	PARTS SIDE
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
	E	5	
+12V	F	6	+12V
	H	7	
COIN COUNTER4	J	8	COIN COUNTER3
	K	9	
SPEAKER(-)	L	10	SPEAKER(+)
	M	11	
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	P	13	VIDEO BLUE
SERVICE SW	R	14	VIDEO GND
	S	15	
COIN SW 4	T	16	COIN SW 3
4P START	U	17	3P START
4P UP	V	18	3P UP
4P DOWN	W	19	3P DOWN
4P LEFT	X	20	3P LEFT
4P RIGHT	Y	21	3P RIGHT
4P SW 1 BUTTON	Z	22	3P SW 1 BUTTON
4P SW 2 BUTTON	a	23	3P SW 2 BUTTON
	b	24	
	c	25	
	d	26	
GND	e	27	GND
GND	f	28	GND

1P・2P

SOLDER SIDE	NO.	NO.	PARTS SIDE (部品面)
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
	E	5	
+12V	F	6	+12V
	H	7	
COIN COUNTER2	J	8	COIN COUNTER1
	K	9	
SPEAKER(-)	L	10	SPEAKER(+)
	M	11	
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	P	13	VIDEO BLUE
SERVICE SW	R	14	VIDEO GND
	S	15	
COIN SW 2	T	16	COIN SW 1
2P START	U	17	1P START
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P SW 1 BUTTON	Z	22	1P SW 1 BUTTON
2P SW 2 BUTTON	a	23	1P SW 2 BUTTON
	b	24	
	c	25	
	d	26	
GND	e	27	GND
GND	f	28	GND

3P・4Pconnector

1P・2Pconnector

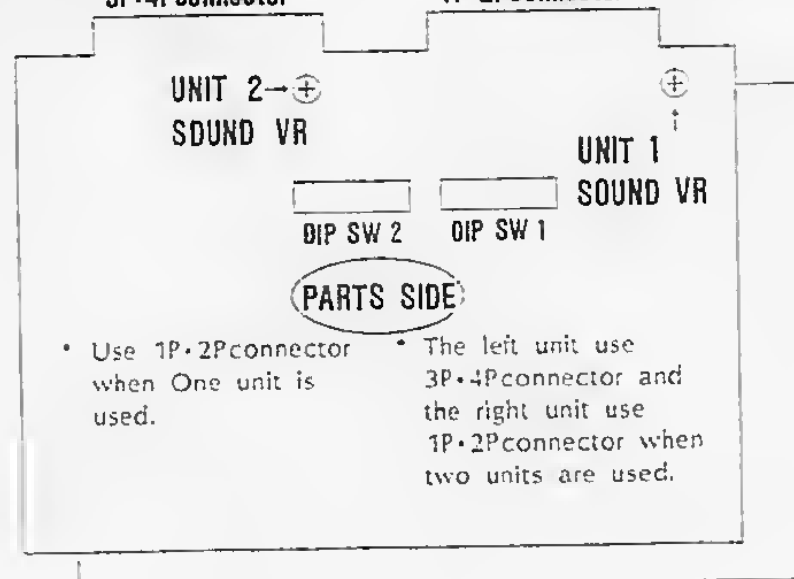

DIP SW(1)

ITEM	MEANING	1	2	3	4	5	6	7	8
COIN 1 (COIN 2)	1 COIN 1 CREDIT	OFF	OFF	OFF					
	2 COINS 1 CREDIT	DN	OFF	OFF					
	3 COINS 1 CREDIT	OFF	DN	OFF					
	4 COINS 1 CREDIT	ON	ON	OFF					
	1 COIN 2 CREDITS	OFF	OFF	ON					
	1 COIN 3 CREDITS	ON	OFF	ON					
	1 COIN 5 CREDITS	OFF	ON	ON					
	1 COIN 6 CREDITS	ON	ON	ON					
CONTINUE	NORMAL				OFF				
	CONTINUE				ON				
PLAYER'S LIFE	1-LIFE					OFF			
	0-LIFE					ON			
GAME TYPE	1 unit 2 players						OFF	OFF	
	1 unit 3 players						ON	OFF	
	1 unit 4 players						OFF	ON	
	2 units 4 players						ON	ON	
COIN SLOT	SAME								OFF
	INDIVIDUAL								ON

*WITH CONTINUE "ON", TWO COINS TO PLAY AND ONE COIN TO CONTINUE.

DIP SW(2)

ITEM	MEANING	1	2	3	4	5	6	7	8
TEST MODE	GAME MODE	OFF							
	TEST MODE	ON							
DIFFICULTY 1	NORMAL		OFF	OFF					
	EASY		ON	OFF					
	HARD		OFF	ON					
	SUPER HARD		ON	ON					
DIFFICULTY 2	NORMAL				OFF	OFF			
	EASY				ON	OFF			
	HARD				OFF	ON			
	SUPER HARD				ON	ON			
N. C.							OFF		
DEMO SOUND	OFF							OFF	
	ON							ON	
SCREEN FLIP-FLOP	NORMAL								OFF
	REVERSE								ON

*DIFFICULTY1 MEANS NUMBER OF ENEMIES, DIFFICULTY2 MEANS THE STRENGTH OF ENEMIES.